


## ■ AnyWireASLINK system master module

FX3S  FX3G  FX3GC  FX3GE  FX3U  FX3UC  FX5U  FX5UC

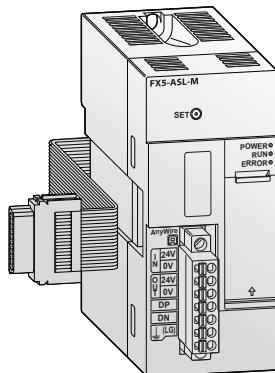


The FX5-ASL-M type AnyWireASLINK system master module is an intelligent function module for building an AnyWireASLINK sensor network.

Specifications	FX5-ASL-M
Module type	AnyWireASLINK system master module
Max.number of I/O points	384
Number of connectable modules	128
Power supply	5 V DC 24 V DC
Related I/O points	200 mA 100 mA
Weight	8 kg
Dimensions (WxHxD)	40x90x83 (97.3 with connector) mm

**Order information** Art. no. 312300

## ■ Modbus® & serial communication special adapter

FX3S  FX3G  FX3GC  FX3GE  FX3U  FX3UC  FX5U  FX5UC

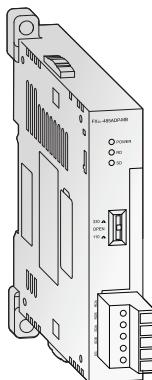

### Active data module (RS485)

The addition of an active data interface module permits active communication between the PLC and surrounding devices.

With RS485 communication can be configured as either 1:N multidrop, parallel link or peer to peer operation.

FX3U-485ADP-MB also supports Modbus® RTU and Modbus® ASCII.

Specifications	FX3U-485ADP-MB	
Interface	RS485; Modbus® RS485	
Communication speed*	kbps	0.3–19.2
Max. communication distance	m	500
Power supply	5 V DC 24 V DC	20 mA (from base unit) —
Related I/O points	0	
Dimensions (WxHxD)	mm	17.6x90(106)x74

**Order information** Art. no. 206191

\* The communication method and communication speed vary depending upon the communication type.

Notes: This adapter module can be connected directly (without special adapter) to a base unit of the FX3GC, FX3GE or FX3UC series. To connect this adapter module to a FX3G, FX3S or FX3U base unit, an adapter is required.