

Max. **260** m<sup>3</sup>/h


## DC axial fans

□ 135 x 38 mm



- **Material:** Housing: Die-cast aluminum  
Impeller: painted sheet steel
- **Direction of air flow:** Exhaust over struts
- **Direction of rotation:** Counterclockwise,  
looking towards rotor
- **Connection:** Via single wires AWG 22,  
TR 64
- **Highlights:** Housing with grounding lug for  
screw M4 x 8 (Torx)  
48 V design incl. screws.
- **Weight:** 650 g
- **Possible special versions:**  
(See chapter DC fans - specials)
  - Speed signal
  - Go / NoGo alarm
  - Alarm with speed limit
  - External temperature sensor
  - Internal temperature sensor
  - PWM control input
  - Analog control input
  - Moisture protection
  - Salt spray protection
  - Degree of protection: IP 54

Series 5100 N															
Nominal data	Air flow	Air flow	Nominal voltage	Voltage range	Sound pressure level	Sound power level	Sintec sleeve bearings Ball bearings	Power consumption*	Nominal speed	Temperature range	Service life L <sub>10</sub> (40 °C) abm - papst standard	Service life L <sub>10</sub> (T <sub>max</sub> ) abm - papst standard	Life expectancy L <sub>10</sub> IPC (40 °C) see page 17	Curve	
	Type	m³/h	cfm	VDC	VDC	dB(A)	Bel(A)	■	Watts	rpm <sup>-1</sup>	°C	Hours	Hours		
5112 N		260	153	12	6...15	48	6.1	■	9.5	2 900	-25...+72	80 000 / 37 500	135 000	①	
5114 N		260	153	24	12...30	48	6.1	■	9.5	2 900	-25...+72	80 000 / 37 500	135 000	①	
5118 N		260	153	48	24...60	48	6.1	■	9.5	2 900	-25...+72	80 000 / 37 500	135 000	①	
Subject to change		* Power consumption at free air flow. These values can be significantly higher in the operating point.													

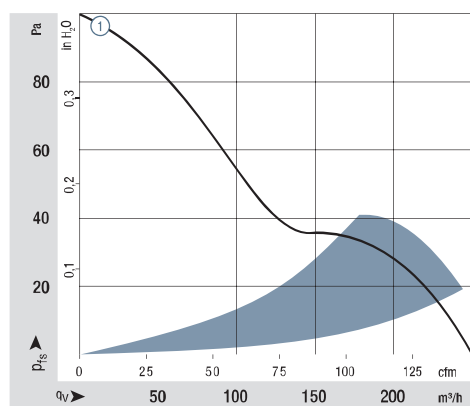

Air performance measured according to: ISO 5801  
Installation category A, without contact protection.  
Noise: Total sound power level  $L_{wA}$  ISO 103002  
measured on a hemisphere with a radius of 2 m.  
Sound pressure level  $L_{pA}$  measured at 1 m distance  
from fan axis.

The values given are applicable only under the specified  
measuring conditions and may differ depending on the  
installation conditions.

In the event of deviation from the standard configuration  
the parameters must be checked after installation!  
For detailed information see  
[http://www.ebmpapst.com/general\\_conditions](http://www.ebmpapst.com/general_conditions)

