



## Crocodile clips

### AK 10

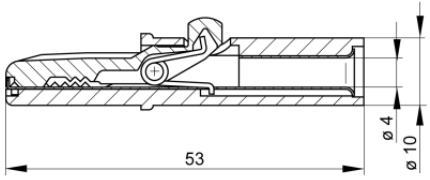

Product	AK 10
description	Insulated alligator clip. Clamping range up to 6 mm bolt diameter. Fine wire section for very thin wires. Only the lower part of the clip has a tin-plated, brass contact insert. 4 mm diameter socket connection.
article-no. / *colour	9301261xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">● 00 black</div> <div style="text-align: center;">● 01 red</div> <div style="text-align: center;">● 02 blue</div> <div style="text-align: center;">● 03 yellow</div> <div style="text-align: center;">● 04 green</div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; margin-top: 5px;">Sn</div>
drawing	
	
technical data	
connection	unsprung socket 4 mm
rated voltage <sup>(1)</sup>	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O <sup>(3)</sup>
rated current <sup>(1)</sup> (consider derating curve)	6 A
material socket	brass, tin plated
housing material	PS
temperature range acc. To IEC61010 <sup>(2)</sup>	-25 °C to +60 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	HB
clamping range	6 mm
standard	IEC 61010

4 mm system

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(3)</sup> Other circuits that are not directly connected to mains

stand: 21.06.2018