
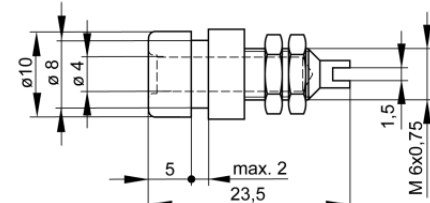


Sockets

BIL 20



| Product | BIL 20 |
|--|---|
| description | Socket with insulated head and ring for installation in equipment chassis and switchpanels with a wall thickness up to 2 mm. 4 mm diameter tin-plated brass socket, with solder Connection and M6 thread. |
| article-no. / *colour | 9301761xx  Sn |
| drawing |  |
| technical data | |
| connection | M6 thread, solder connection |
| rated voltage ⁽¹⁾ | 30 VAC / 60 VDC |
| measurement cat. acc. to IEC 61010 | O ⁽³⁾ |
| rated current ⁽¹⁾ (consider derating curve) | 32 A |
| material socket | brass, tin plated |
| housing material | PA |
| temperature range acc. To IEC61010 ⁽²⁾ | -25 °C to +85 °C |
| flammability class acc. to UL 94 (only valid for basic material of housing) | V-2 |
| standard | IEC 61010 |

4 mm system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ Other circuits that are not directly connected to mains



stand: 16.07.2018