

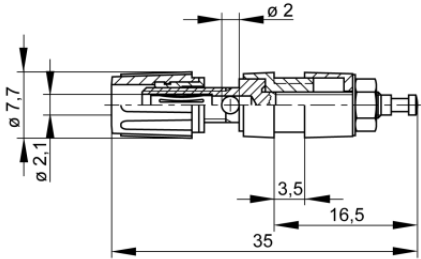


Sockets

MPK 1



Product	MPK 1
description	2 mm diameter miniature pole clamp with transverse hole, insulated, goldplated copper beryllium contact spring, tin-plated brass threaded bolt with solder connection. Suitable for installation in equipment chassis and switch panels up to a maximum wall thickness of 3.5 mm.
article-no. / *colour	9302681xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; margin-top: 5px;">Sn</div>
drawing	
technical data	
connection	solder connection
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	6 A
material socket	brass, tin plated
housing material	PA
temperature range acc. To IEC61010 ⁽²⁾	-20 °C to +60 °C
standard	IEC 61010

2 mm system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ Other circuits that are not directly connected to mains

stand: 30.07.2018