


## Plugs

### SLS 20 B

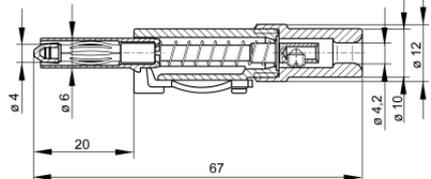

4 mm sliding sleeve system

<b>Product</b>	<b>SLS 20 B</b>												
description	<p>Touch protected plug to assemble with screw connection for cables up to 1.5mm<sup>2</sup>. Insulated by latching and sprung insulating sleeve, to be released by pressure on the lateral locking spring. plug with contact spring, 4mm diameter.</p> <p>*Apply to this typ 150 VDC, CAT II; according IEC / EN 61010-031 item 6.4.2; allowed for devices that are equipped with terminals which cannot accept fully shrouded connectors.</p>												
article-no. / *colour	<p>9318251xx</p> <table style="width: 100%; text-align: center;"> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>00 black</td> <td>01 red</td> <td>02 blue</td> <td>03 yellow</td> <td>04 green</td> <td>07 white</td> </tr> </table> <p style="text-align: right;"><b>Ni</b></p>							00 black	01 red	02 blue	03 yellow	04 green	07 white
													
00 black	01 red	02 blue	03 yellow	04 green	07 white								
<b>drawing</b>													
<b>technical data</b>													
connection	screw terminal												
rated voltage <sup>(1)</sup>	30 VAC / 60 VDC												
measurement cat. acc. to IEC 61010	O <sup>(3)</sup>												
rated current <sup>(1)</sup> (consider derating curve)	16 A												
material plug	brass, nickel plated												
housing material	POM												
temperature range acc. To IEC61010 <sup>(2)</sup>	-25 °C to +80 °C												
standard	IEC 61010												

- <sup>(1)</sup> for normal environmental conditions -5°C to +40°C  
<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges  
<sup>(3)</sup> Other circuits that are not directly connected to mains  
stand: 07.08.2018