
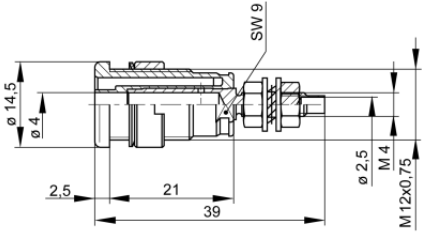


## Sockets

### SEB 2600 G M4



<b>Product</b>	<b>SEB 2600 G M4</b>
description	Safety built-in socket, 4 mm diameter, touch-protected, M 4 thread and solder connection, gold-plated brass. For installation into switch panels and equipment chassis with wall thicknesses up to 6 mm. Installation hole: 12.2 mm diameter, Tightening torque: 50 Ncm Accessory: assembly tool MW SEB
operating instruction	BA451
article-no. / *colour	9723541xx  <span style="border: 1px solid black; padding: 2px;">Au</span>
<b>drawing</b>	
<b>technical data</b>	
connection	M4 thread, solder connection
rated voltage <sup>(1)</sup>	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current <sup>(1)</sup> (consider derating curve)	32 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 <sup>(2)</sup>	-40 °C to +80 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	V-2

4 mm safety system

standard	IEC 61010
----------	-----------

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

stand: 13.05.2016