


Crocodile clips

MICRO-SMD CLIP 1

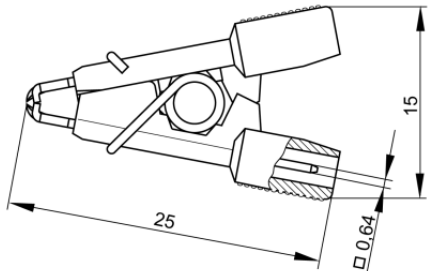

Product	MICRO-SMD CLIP 1	
description	Spring-loaded, two-pol test clip, specially designed for SMD components. Gold plated, hardened tip for testing circuits, flat-nosed grips for individual components, notch for gripping thin wires. Balanced spring force permits testing of large and small components. 0.64mm pin connection. electrically insulated spring.	
Articlenummer	972416100	Au
drawing		
		
technical data		
connection	pin Ø 0.64 mm	
rated voltage ⁽¹⁾	30 VAC / 60 VDC	
measurement cat. acc. to IEC 61010	O ⁽³⁾	
rated current ⁽¹⁾ (consider derating curve)	1 A	
material socket	SKS_KUPFER-BERYLLIUM-VERGOLDET	
housing material	PBT	
temperature range acc. To IEC61010 ⁽²⁾	-30 °C to +100 °C	
flammability class acc. to UL 94 (only valid for basic material of housing)	HB	
clamping range	8 mm	
standard	IEC 61010	

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ Other circuits that are not directly connected to mains

0.64 mm system

stand: 22.06.2018