




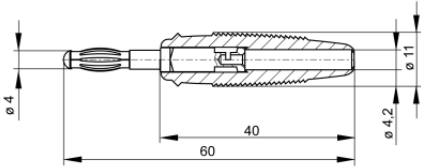


Plugs

LAS 30 Au



Product	LAS 30 Au
description	Laminated, shatter-proof plug with caged spring and tapering sleeve providing protection against kinking. Soldered connections up to 1.5mm ² , cable diameters up to 4.2mm. Gold-plated brass contact, gold-plated copper beryllium contact spring.
article-no. / *colour	9725187xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> 00 black</div> <div style="text-align: center;"> 01 red</div> <div style="text-align: center;"> 02 blue</div> <div style="text-align: center;"> 03 yellow</div> <div style="text-align: center;"> 04 green</div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; margin-top: 5px;">Au</div>
drawing	
technical data	
connection	solder connection
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	32 A
material plug	brass, gold plated
housing material	PVC-P
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
standard	IEC 61010

4 mm system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ Other circuits that are not directly connected to mains

stand: 30.07.2018