



RoHS ✓



The information/details in this datasheet merely contain general descriptions or performance factors which, when applied in an actual situation, do not always correspond with the described form, and may be amended by way of the further development of products. The desired performance factors shall only be binding if these are expressly agreed on conclusion of the contract.

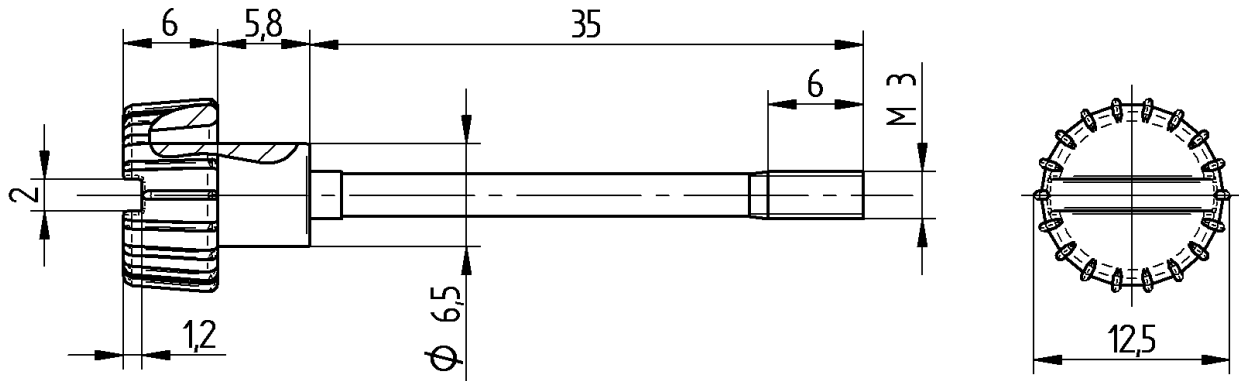

DIN ISO 5456-2

**Product description**

Description	Knurled head screw
Type	GDM 3011-7
Order No	732-488-...

**Materials**

Material	Screw: 5.8 DIN ISO 898 T1 Head: see standard products
Surface	Screw: Ni 5 mt

**Environmental conditions**

Temperature range	-55°C to +125°C, notice Derating
-------------------	----------------------------------

**Additional technical data**

Fastening torque	M 3: (50-60) Ncm
------------------	------------------

**Standard products**

<b>Artikel-No.</b>	<b>Type</b>	<b>Material</b>
732-488-002	GDM 3011-7 grau	PA 6 GF30, grey
732-488-900	GDM 3011-7 sw	PA 6 GF30, black